

SOLUTIONS MANUAL

**DATA AND COMPUTER
COMMUNICATIONS**
EIGHTH EDITION



WILLIAM STALLINGS

SOLUTIONS MANUAL

DATA AND COMPUTER
COMMUNICATIONS
EIGHTH EDITION
CHAPTERS 1 - 12

Do Not Post on Web

WILLIAM STALLINGS

Copyright 2007: William Stallings

© 2007 by William Stallings

All rights reserved. No part of this document may be reproduced, in any form or by any means, or posted on the Internet, without permission in writing from the author. Selected solutions may be shared with students, provided that they are not available, unsecured, on the Web.

NOTICE

This manual contains solutions to all of the review questions and homework problems in *Data and Computer Communications, Eighth Edition*. If you spot an error in a solution or in the wording of a problem, I would greatly appreciate it if you would forward the information via email to ws@shore.net. An errata sheet for this manual, if needed, is available at <ftp://shell.shore.net/members/w/s/ws/S>.

W.S.

Please Do Not
Post on Web

TABLE OF CONTENTS

Chapter 2:	Protocol Architecture.....	5
Chapter 3:	Data Transmission	9
Chapter 4:	Transmission Media.....	13
Chapter 5:	Signal Encoding Techniques.....	17
Chapter 6:	Digital Data Communications Techniques	26
Chapter 7:	Data Link Control Protocols.....	33
Chapter 8:	Multiplexing.....	40
Chapter 9:	Spread Spectrum	45
Chapter 10:	Circuit Switching and Packet Switching.....	48
Chapter 11:	Asynchronous Transfer Mode.....	53
Chapter 12:	Routing in Switched Networks.....	59

Please Do Not
Post on Web

CHAPTER 2

PROTOCOL ARCHITECTURE, TCP/IP, AND INTERNET-BASED APPLICATIONS

ANSWERS TO QUESTIONS


- 2.1 The network access layer is concerned with the exchange of data between a computer and the network to which it is attached.
- 2.2 The transport layer is concerned with data reliability and correct sequencing.
- 2.3 A protocol is the set of rules or conventions governing the way in which two entities cooperate to exchange data.
- 2.4 A PDU is the combination of data from the next higher communications layer and control information.
- 2.5 The software structure that implements the communications function. Typically, the protocol architecture consists of a layered set of protocols, with one or more protocols at each layer.
- 2.6 Transmission Control Protocol/Internet Protocol (TCP/IP) are two protocols originally designed to provide low level support for internetworking. The term is also used generically to refer to a more comprehensive collection of protocols developed by the U.S. Department of Defense and the Internet community.
- 2.7 Layering decomposes the overall communications problem into a number of more manageable subproblems.
- 2.8 A router is a device that operates at the Network layer of the OSI model to connect dissimilar networks.
- 2.9 IPv4.
- 2.10 No, other transport layer protocols, such as UDP, are also used. Some traffic uses no transport protocol, such as ICMP.
- 2.11 IPv4 - 32 bits; IPv6 - 128 bits

ANSWERS TO PROBLEMS

- 2.1 The guest effectively places the order with the cook. The host communicates this order to the clerk, who places the order with the cook. The phone system provides the physical means for the order to be transported from host to clerk. The cook


gives the pizza to the clerk with the order form (acting as a "header" to the pizza). The clerk boxes the pizza with the delivery address, and the delivery van encloses all of the orders to be delivered. The road provides the physical path for delivery.

2.2 a.

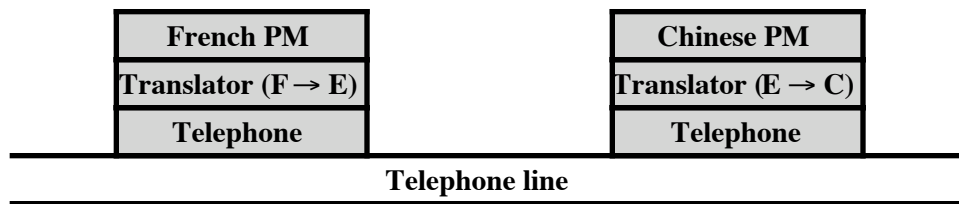

The PMs speak as if they are speaking directly to each other. For example, when the French PM speaks, he addresses his remarks directly to the Chinese PM. However, the message is actually passed through two translators via the phone system. The French PM's translator translates his remarks into English and telephones these to the Chinese PM's translator, who translates these remarks into Chinese.

b.

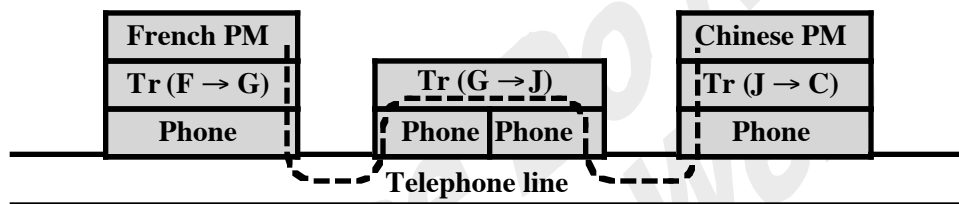

An intermediate node serves to translate the message before passing it on. Note that the intermediate node handles the message only up to the second level; a minister's level is not needed.

- 2.3 Perhaps the major disadvantage is the processing and data overhead. There is processing overhead because as many as seven modules (OSI model) are invoked to move data from the application through the communications software. There is data overhead because of the appending of multiple headers to the data. Another possible disadvantage is that there must be at least one protocol standard per layer. With so many layers, it takes a long time to develop and promulgate the standards.
- 2.4 No. There is no way to be assured that the last message gets through, except by acknowledging it. Thus, either the acknowledgment process continues forever, or one army has to send the last message and then act with uncertainty.
- 2.5 A case could be made either way. **First**, look at the functions performed at the network layer to deal with the communications network (hiding the details from the upper layers). The network layer is responsible for routing data through the network, but with a broadcast network, routing is not needed. Other functions, such as sequencing, flow control, error control between end systems, can be accomplished at layer 2, because the link layer will be a protocol directly between the two end systems, with no intervening switches. So it would seem that a network layer is not needed. **Second**, consider the network layer from the point of view of the upper layer using it. The upper layer sees itself attached to an access point into a network supporting communication with multiple devices. The layer for assuring that data sent across a network is delivered to one of a number of other end systems is the network layer. This argues for inclusion of a network layer.

In fact, the OSI layer 2 is split into two sublayers. The lower sublayer is concerned with medium access control (MAC), assuring that only one end system at a time transmits; the MAC sublayer is also responsible for addressing other end systems across the LAN. The upper sublayer is called Logical Link Control (LLC). LLC performs traditional link control functions. With the MAC/LLC combination, no network layer is needed (but an internet layer may be needed).

- 2.6
 - a. No. This would violate the principle of separation of layers. To layer $(N - 1)$, the N -level PDU is simply data. The $(N - 1)$ entity does not know about the internal format of the N -level PDU. It breaks that PDU into fragments and reassembles them in the proper order.
 - b. Each N -level PDU must retain its own header, for the same reason given in (a).
- 2.7 Data plus transport header plus internet header equals 1820 bits. This data is delivered in a sequence of packets, each of which contains 24 bits of network header and up to 776 bits of higher-layer headers and/or data. Three network packets are needed. Total bits delivered = $1820 + 3 \times 24 = 1892$ bits.
- 2.8 UDP provides the source and destination port addresses and a checksum that covers the data field. These functions would not normally be performed by protocols above the transport layer. Thus UDP provides a useful, though limited, service.
- 2.9 In the case of IP and UDP, these are unreliable protocols that do not guarantee delivery, so they do not notify the source. TCP does guarantee delivery. However, the technique that is used is a timeout. If the source does not receive an acknowledgment to data within a given period of time, the source retransmits.
- 2.10 UDP has a fixed-sized header. The header in TCP is of variable length.
- 2.11 Suppose that A sends a data packet k to B and the ACK from B is delayed but not lost. A resends packet k , which B acknowledges. Eventually A receives 2 ACKs to packet k , each of which triggers transmission of packet $(k + 1)$. B will ACK both copies of packet $(k + 1)$, causing A to send two copies of packet $(k + 2)$. From now on, 2 copies of every data packet and ACK will be sent.
- 2.12 TFTP can transfer a maximum of 512 bytes per round trip (data sent, ACK received). The maximum throughput is therefore 512 bytes divided by the round-trip time. Source: [STEV94].
- 2.13 The "netascii" transfer mode implies the file data are transmitted as lines of ASCII text terminated by the character sequence {CR, LF}, and that both systems must convert between this format and the one they use to store the text files locally. This means that when the "netascii" transfer mode is employed, the file sizes of the local and the remote file may differ, without any implication of errors in the data transfer. For example, UNIX systems terminate lines by means of a single LF character, while other systems, such as Microsoft Windows, terminate lines by means of the character sequence {CR, LF}. This means that a given text file will usually occupy more space in a Windows host than in a UNIX system.
- 2.14 If the same TIDs are used in twice in immediate succession, there's a chance that packets of the first instance of the connection that were delayed in the network

arrive during the life of the second instance of the connection, and, as they would have the correct TIDs, they could be (mistakenly) considered as valid.

- 2.15** TFTP needs to keep a copy of only the last packet it has sent, since the acknowledgement mechanism it implements guarantees that all the previous packets have been received, and thus will not need to be retransmitted.
- 2.16** This could trigger an "error storm". Suppose host A receives an error packet from host B, and responds it by sending an error packet back to host B. This packet could trigger another error packet from host B, which would (again) trigger an error packet at host A. Thus, error messages would bounce from one host to the other, indefinitely, congesting the network and consuming the resources of the participating systems.
- 2.17** The disadvantage is that using a fixed value for the retransmission timer means the timer will not reflect the characteristics of the network on which the data transfer is taking place. For example, if both hosts are on the same local area network, a 5-second timeout is more than enough. On the other hand, if the transfer is taking place over a (long delay) satellite link, then a 5-second timeout might be too short, and could trigger unnecessary retransmissions. On the other hand, using a fixed value for the retransmission timer keeps the TFTP implementation simple, which is the objective the designers of TFTP had in mind.
- 2.18** TFTP does not implement any error detection mechanism for the transmitted data. Thus, reliability depends on the service provided by the underlying transport protocol (UDP). While the UDP includes a checksum for detecting errors, its use is optional. Therefore, if UDP checksums are not enabled, data could be corrupted without being detected by the destination host.
- 2.20**
- a. The internet protocol can be defined as a separate layer. The functions performed by IP are clearly distinct from those performed at a network layer and those performed at a transport layer, so this would make good sense.
 - b. The session and transport layer both are involved in providing an end-to-end service to the OSI user, and could easily be combined. This has been done in TCP/IP, which provides a direct application interface to TCP.

CHAPTER 3

DATA TRANSMISSION

ANSWERS TO QUESTIONS

- 3.1 With guided media, the electromagnetic waves are guided along an enclosed physical path whereas unguided media provide a means for transmitting electromagnetic waves but do not guide them.
- 3.2 A continuous or analog signal is one in which the signal intensity varies in a smooth fashion over time while a discrete or digital signal is one in which the signal intensity maintains one of a finite number of constant levels for some period of time and then changes to another constant level.
- 3.3 Amplitude, frequency, and phase are three important characteristics of a periodic signal.
- 3.4 2π radians.
- 3.5 The relationship is $\lambda f = v$, where λ is the wavelength, f is the frequency, and v is the speed at which the signal is traveling.
- 3.6 The fundamental frequency is the lowest frequency component in the Fourier representation of a periodic quantity.
- 3.7 The spectrum of a signal is the frequencies it contains while the bandwidth of a signal is the width of the spectrum.
- 3.8 Attenuation is the gradual weakening of a signal over distance.
- 3.9 The rate at which data can be transmitted over a given communication path, or channel, under given conditions, is referred to as the channel capacity.
- 3.10 Bandwidth, noise, and error rate.

ANSWERS TO PROBLEMS

- 3.1 a. If two devices transmit at the same time, their signals will be on the medium at the same time, interfering with each other; i.e., their signals will overlap and become garbled.
b. See discussion in Section 15.3. on medium access control.
- 3.2 Period = $1/1000 = 0.001$ s = 1 ms.
- 3.3 a. $\sin(2\pi ft - \pi) + \sin(2\pi ft + \pi) = 2 \sin(2\pi ft + \pi)$ or $2 \sin(2\pi ft - \pi)$ or $-2 \sin(2\pi ft)$
b. $\sin(2\pi ft) + \sin(2\pi ft - \pi) = 0$.

3.4

N	C		D		E		F		G		A		B		C
F	264		297		330		352		396		440		495		528
D		33		33		22		44		44		55		33	
W	1.25		1.11		1		0.93		0.83		0.75		0.67		0.63

N = note; F = frequency (Hz); D = frequency difference; W = wavelength (m)

3.5 $2 \sin(4\pi t + \pi)$; $A = 2$, $f = 2$, $\phi = \pi$

3.6 $(1 + 0.1 \cos 5t) \cos 100t = \cos 100t + 0.1 \cos 5t \cos 100t$. From the trigonometric identity $\cos a \cos b = (1/2)(\cos(a + b) + \cos(a - b))$, this equation can be rewritten as the linear combination of three sinusoids:
 $\cos 100t + 0.05 \cos 105t + 0.05 \cos 95t$. Source: [MOSH89]

3.7 We have $\cos^2 x = \cos x \cos x = (1/2)(\cos(2x) + \cos(0)) = (1/2)(\cos(2x) + 1)$. Then:
 $f(t) = (10 \cos t)^2 = 100 \cos^2 t = 50 + 50 \cos(2t)$. The period of $\cos(2t)$ is π and therefore the period of $f(t)$ is π .

3.8 If $f_1(t)$ is periodic with period X , then $f_1(t) = f_1(t + X) = f_1(t + nX)$ where n is an integer and X is the smallest value such that $f_1(t) = f_1(t + X)$. Similarly, $f_2(t) = f_2(t + Y) = f_2(t + mY)$. We have $f(t) = f_1(t) + f_2(t)$. If $f(t)$ is periodic with period Z , then $f(t) = f(t + Z)$. Therefore $f_1(t) + f_2(t) = f_1(t + Z) + f_2(t + Z)$. This last equation is satisfied if $f_1(t) = f_1(t + Z)$ and $f_2(t) = f_2(t + Z)$. This leads to the condition $Z = nX = mY$ for some integers n and m . We can rewrite this last as $(n/m) = (Y/X)$. We can therefore conclude that if the ratio (Y/X) is a rational number, then $f(t)$ is periodic.

3.9 The signal would be a low-amplitude, rapidly changing waveform.

3.10 No transmission medium is capable of transmitting the entire spectrum of frequencies. A real signal therefore is bandlimited, with frequencies above a certain point absent. However, most of the information is in the lower frequencies. This is not a problem if it is remembered that the object of the transmission is to send signals that represent binary 1s and 0s. Even though there will be some distortion because of the loss of higher frequencies, the shape of the original pulse is known (by the specifications for the transmission system). Thus, the receiver will usually be able to distinguish a binary 0 from a binary 1.

3.11 A 6-bit code allows only 64 unique characters to be defined. Several *shift lock codes* were defined in various versions of TTS (shift, supershift, unshift). These codes change the meaning of all codes that follow until a new shift lock code appears. Thus, with two shift locks, $3 \times (64 - 3) = 183$ different codes can be defined. The actual number is less, since some codes, such as space, are "don't-cares" with respect to shift locks.

3.12 Refer to the reasoning of Section 3.2. Retaining the vertical resolution of 483 lines, each horizontal line occupies $52.5 \mu\text{sec}$. A horizontal resolution of H lines results in a maximum of $H/2$ cycles per line, thus the bandwidth of 5 MHz allows: